

Aquaculture Mooring Shackle

Gunnebo Industries HDG shackles are designed to meet the specific demands from the global aquaculture industry. The shackles are produced from a grade of steel that has been developed to comply with the industry standards. Our modern manufacturing facilities in Norway are self-sufficient, from the initial tooling design and manufacture, through the component production facilities. All aspects of production are continually monitored at all stages: including forging, heat treatment, machining, hot dip galvanizing and final quality inspection. We have an extensive experience of shackle production using modern manufacturing methods.

Our Mooring shackle no. 852 has been developed specifically for the Aquaculture industry, with its unique

feature of a counter sunk bolt which locks the shackle, and with increased material thickness in the bow we have improved the fatigue resistance. With all our mooring shackles we are able to offer several securing options; standard or tailored. For many years our unique no. 852 mooring shackle has been used extensively in the Aquaculture industry.

Gunnebo Industries have improved this type of shackle through continuous improvement to satisfy the exacting demands of the Aquaculture industry. To fulfil one of these demands we have added countersunk shackle type A0830 to our portfolio of aquaculture products. We offer countersunk shackles both in Dee and Bow form.

Mooring Shackle No 852

Standard: Third party approved acc. to relevant Norwegian aquaculture standards

Material: High Tensile Steel. Quenched and Tempered, Grade 6

Finish: All parts hot dip galvanized + brown colour marking


Plastic clip provided as standard safety pin for 28T - 90T, Stainless steel A4 split pins provided as standard for 110T and 150T

Art.no	D Trade size		MBL (tonnes)	A	C	E	D2	D1
	mm	inch						
A085219	19	3/4"	28	44	100	58	48	22
*A085222	22	7/8"	40	52	125	68	52	25
*A085228	28	1 1/8"	60	62	150	89	64	28
*A085232	32	1 1/4"	90	82	170	98	72	32
A085242	42	1 5/8"	110	112	200	150	90	45
A085245	45	1 3/4"	150	126	248	175	105	50

* These sizes come with a sunken hexagon bolt head that will greatly reduce the risk of the bolt unscrewing during use as well as making the fitting easier for the user.

Customized securing options

- Plastic covered seizing wire
- Plastic covered steel wire
- Stainless steel cotter pin
- Clips (28T to 40T) – Yellow
- Clips (60T to 90 T) – Green

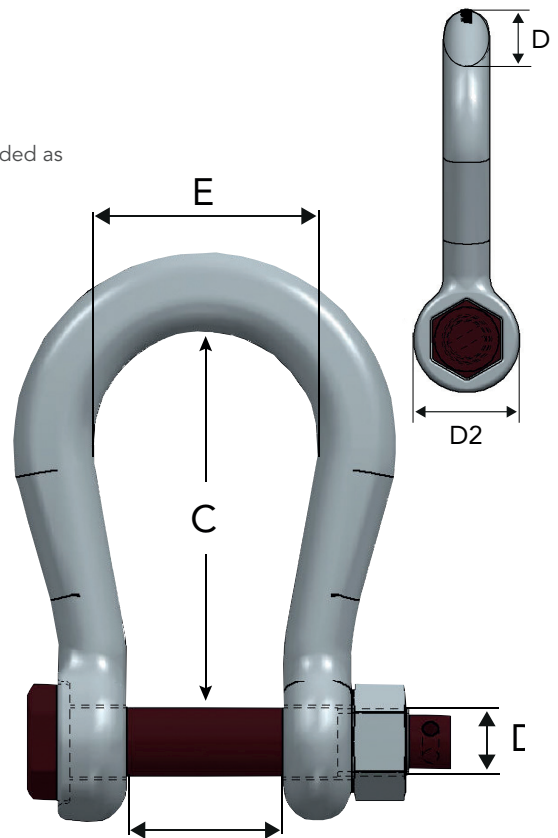

Mooring shackle No. 852

- Sunken bolt locks into the shackle to prevent rotation (unintentional loosening of the nut).
- The sunken bolt also reduces the risk of the shackle interacting with the net.
- Fatigue resistance is increased by the addition of 25% extra material in the bow (increased life span and safety).
- Spacious bow for connecting thimbles, rope and mooring/connecting plates.
- Easy to operate; Only one tool needed to assemble/disassemble.
- Hot dip galvanized pins (normally zinc plated) C/W grade 8 nuts.